


**DC VOLTAGE 80KV TO  
150KV POWER UP TO 20KJ/S**

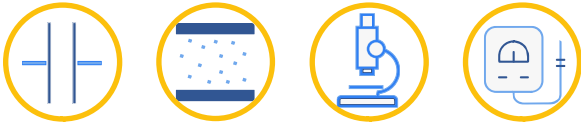

CCR serie is designed to offer optimal performance in a compact design for capacitor chargers. CCR Power Supply from 80kV to 150kV provide high reliability without any special maintenance.

## APPLICATIONS

- Pulsed applications
- Capacitors
- Research and Development
- Test Equipment
- Accelerators
- Nuclear fusion
- Marx generator

## MAIN SPECIFICATION

- Output Voltage: 80kV to 150kV
- Charging Power: 750J/s to 20kJ/s
- Polarity: Positive or Negative
- Operating frequency: <10Hz, up to 3kHz (option)
- Reproducibility: <0.1%
- Voltage holding: <0.1%p-p of full voltage
- Remote interface: 0-10V analogue

## TECHNICAL SPECIFICATIONS

FORMAT	19" Rack or 19" cabinet
EFFICIENCY	> 90% at full load
MAINS INPUT	400 VAC $\pm 10\%$ , 47-63 Hz 3 Phases + Earth
INPUT POWER FACTOR	$\geq 0.90$ at full load
INRUSH CURRENT	Limited to operating current at full power
REMOTE CONTROL MODE	External 0 to 10V analog interface
REGULATION MODES	Charging with constant current. Switches to voltage regulation once the charging voltage is reached
STATIC LOAD REGULATION	$\pm 0.05\%$ of full voltage or current, from no load to full load (lower on demand)
STATIC LINE REGULATION	$\pm 0.05\%$ of full voltage or current for $\pm 10\%$ mains voltage (lower on demand)
STABILITY (AFTER 1-HOUR WARM-UP)	100 ppm/hour, operating at constant load and temperature
PROTECTIONS	Short circuit, External interlock, Over temperature, Overload, Over voltage, Over current
STORED ENERGY	0.2 J/kJ
ACCESSORIES	3m removable coaxial HV cable, interlock terminator, 2 safety keys

## CONTROL

LOCAL CONTROLS	Mains power switch, safety lock, HV on, HV off, Over current mode, Preset, Limitation of voltage setting
OUTPUT VOLTAGE AND CURRENT SETTING	10 turn potentiometer (0.05% resolution) Continuously adjustable from 0 to 100%
VOLTAGE AND CURRENT DISPLAY	4.5 Digit
STATUS INDICATORS	HV on, HV off, Line, Fault, Interlock, Remote, Over current limitation/protection, Regulation mode ( end of charge )
REMOTE CONTROL INTERFACE	Standard: 0-10V Analogue On demand: RS-232, Ethernet, 0-10V Isolated Analogue, 0-10V Analogue with 24V relay, Optical fiber
REMOTE CONTROL SOFTWARE	Labview



## OPERATING ENVIRONMENT

AMBIENT TEMPERATURE	From 0 to 50 °C
AMBIENT HUMIDITY	0 to 80% at 25°C, 50% at 40°C (non-condensing)
TEMPERATURE COEFFICIENT	100 ppm/°C
COOLING	Air forced Inlet through front panel (dust filters) Outlet at rear panel

## STANDARDS AND REGULATIONS


CE CERTIFIED AND ACCORDING	<p>Low voltage directive: 2014/35/EU</p> <p>EMC directive: 2014/30/EU</p> <p>RoHS directive: 2011/65/EU</p> <p>EN 61000-6-2:2005 + AC (2005)</p> <p>EN 61000-6-4:2007 + A1 (2011)</p> <p>EN 61326-1:2013</p> <p>EN 61000-3-2:2014</p> <p>EN 61000-3-3:2013</p> <p>EN 61010-1:2010</p> <p>EUROLAB EMC decision n°11: issue 1 of 18 of December 2007</p>
----------------------------	--

## DOCUMENTATION AND SERVICES

DOCUMENTATIONS	<p>User manual</p> <p>Device test report</p> <p>EU declaration of conformity </p> <p>RoHS2 declaration of conformity </p>
WARRANTY	<p>2 years</p> <p>Extension on demand</p>
ON DEMAND	<p>Factory Acceptance Test (FAT)</p> <p>Detailed design report</p> <p>Custom tests</p> <p>Manufacturing process certification</p> <p>Special engineering</p>

## INTERFACES


### FRONT PANEL

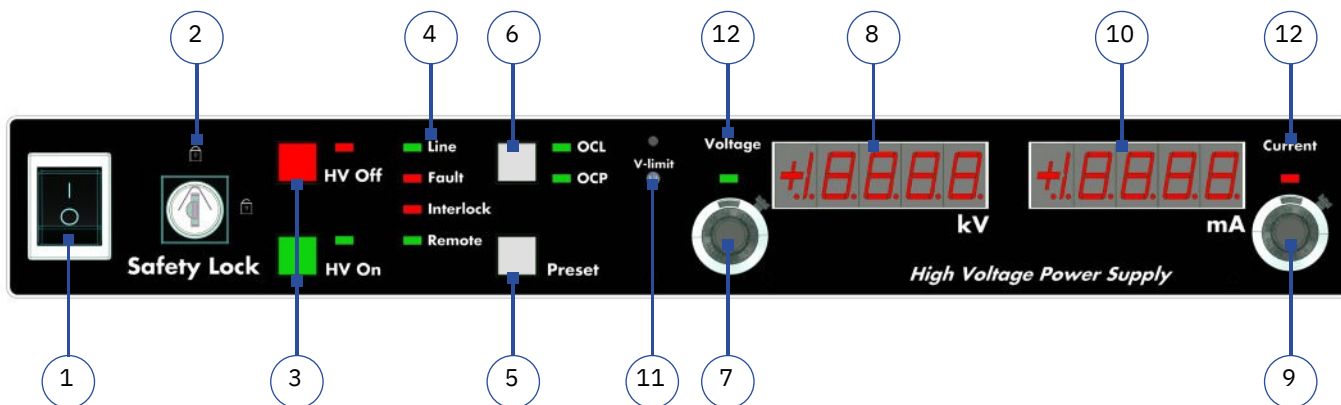

- |  |  |  |
|--|--|--|
| <ul style="list-style-type: none"> <li>1. ON/OFF switch</li> <li>2. Safety lock (key)</li> <li>3. HV ON/OFF push button</li> </ul> | <ul style="list-style-type: none"> <li>4. Statuses (Line, Fault, Interlock, Remote)</li> <li>5. Preset push button</li> <li>6. Over Current Limitation (OCL) Over Current Protection (OCP)</li> <li>7. Voltage setting</li> <li>11. Local voltage setting limitation</li> <li>12. Regulation mode (Voltage)</li> </ul> | <ul style="list-style-type: none"> <li>8. Voltage display</li> <li>9. Current setting</li> <li>10. Current display</li> <li>11. Local voltage setting limitation</li> <li>12. Regulation mode (Current)</li> </ul> |
|--|--|--|

### REAR PANEL

- 1. HV output
- 2. RS-232 (option)
- 3. Earth bolt
- 4. Ethernet (option)
- 5. Mains input
- 6. Optical fiber (option)
- 7. Analog interface

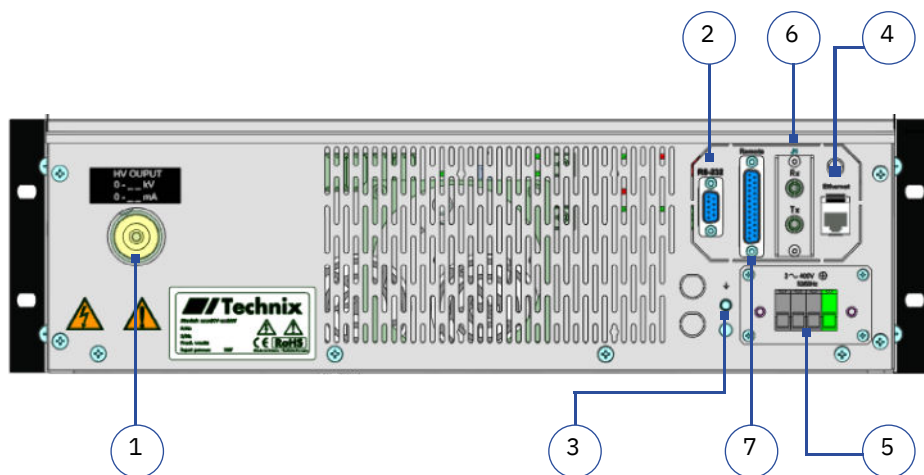

## 0-10V ANALOG INTERFACE

PIN	SIGNAL	SIGNAL DESCRIPTION	I/O	IMPEDANCE
1	HV-Off control	Produced by a fleeting opening from pin 16	Input	20Ω
2	Fault status	Internal Fault: 0V = Detected; +15V = No	Output	100Ω
3	Interlock status	fault External interlock: 0V = Open; +15V =	Output	475Ω
4	HV-On control	Closed Produced by a fleeting closing to	Input	20Ω
5	Output voltage measurement	pin 16	Output	475Ω
	Output current measurement	0V to 10V = 0% to 100%		475Ω
6	Inhibit control	0V to 10V = 0% to 100%	Output	
7	Remote	Activated by digital signal between +5V to +24V	Input	
8	control	Open contact = Local control mode; Closed contact = Remote control mode	Input	20Ω
9		Not connected		
10	Arc monitor (Mains Monitor for older models)	Generates a signal when an arc is detected: +15V = No arc; 0V = Arc detected Older models (shipped before January 2023): Generates a fault if the mains input is failing: 0V = Mains is fine; +15V = Mains is failing	Output	100Ω
11	Output power measurement (option)	0V to 10V = 0% to 100% (option)	Output	475Ω
12	Local output voltage setting	Copy of the setting on the front panel potentiometer. 0V to 10V = 0% to 100%	Output	10Ω
13	Local output current setting	Copy of the setting on the front panel potentiometer. 0V to	Output	10Ω
14	Remote output current setting	10V = 0% to 100%	Input	115Ω
15	+10V reference	0V to 10V = 0% to 100%	Output	2.7Ω
16	0V reference (digital signals)	+10V reference for analog signals, max current : 5mA	Output	
17	Remote output voltage setting	0V ground reference for digital signals	Output	
18	Regulation mode status or End of Charge status	0V to 10V = 0% to 100% of max output voltage	Input	115Ω
19	HV-On status	DC power supply: Open contact = Current Regulation; +24V = Voltage Regulation CC power supply: Open contact = Capacitor charging; +24V = End of charge	Output	100Ω
20	0V reference (analogue signals)	0V = HV output disabled (HV Off) +15V = HV output enabled (HV On)	Output	100Ω
21-22-23		0V ground reference for analogue signals	Output	
24	External Interlock	Not connected		
25	+10V Reference or Remote output power setting (option)	Connect to pin 16 to close the interlock.	Input	500Ω
		Standard: +10V reference for analog signals, max current : 5mA Option: 0V to 10V = 0% to 100% of max output power	Output	2.7Ω or 115Ω

## OPTIONS

- Auto inhibition after discharge
- Parallel operation
- Custom remote interface
- Emergency stop switch
- Special mains input
- Non Instrumented front panel
- Industrial dust filters
- Remote Front panel
- Tropicalization
- Custom design

## RANGES

model reference: CCR 80 kV to 150 kV - 0.75 kJ/s to 24 kJ/s

VOLTAGE          CHARGING POWER

OUTPUT VOLTAGE	0.75 kJ/s	1.5 kJ/s	2.5 kJ/s	3 kJ/s	4 kJ/s	5 kJ/s	6 kJ/s	7.5 kJ/s	8 kJ/s	10 kJ/s	12 kJ/s	15 kJ/s	20 kJ/s	24 kJ/s
	Max Current													
80 kV	2.14 A	4.29 A	60 mA	80 mA	100 mA	130 mA	150 mA	188 mA	200 mA	250 mA	300 mA	375 mA	500 mA	600 mA
100 kV	Contact us		50 mA	60 mA	80 mA	100 mA	120 mA	150 mA	160 mA	200 mA	240 mA	300 mA	400 mA	480 mA
120 kV	Contact us		40 mA	50 mA	70 mA	80 mA	100 mA	125 mA	133 mA	167 mA	Contact us			
150 kV	Contact us													

## DIMENSION

MODEL 7U - 19" : 311 x 483 x 600 mm (H x W x D)

