

DC VOLTAGE UP TO 60KV
POWER FROM 150W TO 40KW



SR serie is designed to offer optimal performance in a compact design. Air or special isolated, SR Power Supply from 700V to 60kV provide high reliability without any special maintenance.

APPLICATIONS

- Pulsed applications
- Capacitors
- Research and Développement
- Test Equipment
- Accelerators
- Beams (Electron-Ion)
- Tubes

MAIN SPECIFICATION

- Output Voltage: up to 60kV
- Output Power: 150W to 40kW
- Polarity: Positive-Negative-Reversible-Floating
- Rise -time(10-90%): < 80 ms
- Ripple + Noise: 0.1% RMS of max output voltage
- Remote interface : 0-10V analogue

TECHNICAL SPECIFICATIONS

FORMAT	19" Rack or 19" cabinet
EFFICIENCY	> 92% at full load
MAINS INPUT	400 VAC $\pm 10\%$, 47-63 Hz 3 Phases + Earth
INPUT POWER FACTOR	≥ 0.90 at full load
INRUSH CURRENT	Limited to operating current at full power
REMOTE CONTROL MODE	External 0 to 10V analog interface
REGULATION MODES	Constant Voltage (CV) and Constant Current (CC) regulations, automatic crossover. Power regulation on demand.
STATIC LOAD REGULATION	$\pm 0.05\%$ of full voltage or current, from no load to full load (lower on demand)
STATIC LINE REGULATION	$\pm 0.05\%$ of full voltage or current for $\pm 10\%$ mains voltage (lower on demand)
STABILITY (AFTER 1-HOUR WARM-UP)	100 ppm/hour, operating at constant load and temperature
PROTECTIONS	Short circuit, Arc quench, External interlock, Over temperature, Overload, Over voltage, Over current
STORED ENERGY	1 J/kW
ACCESSORIES	3m removable coaxial HV cable, interlock terminator, safety key

CONTROL

LOCAL CONTROLS	Mains power switch, safety lock, HV on, HV off, Over current mode, Preset, Limitation of voltage setting
OUTPUT VOLTAGE AND CURRENT SETTING	10 turn potentiometer (0.05% resolution) Continuously adjustable from 0 to 100%
VOLTAGE AND CURRENT DISPLAY	4.5 Digit
STATUS INDICATORS	HV on, HV off, Line, Fault, Interlock, Remote, Over current limitation/protection, Regulation mode
REMOTE CONTROL INTERFACE	Standard: 0-10V Analogue On demand: RS-232, Ethernet, 0-10V Isolated Analogue, 0-10V Analogue with 24V relay, Optical fiber
REMOTE CONTROL SOFTWARE	Labview



OPERATING ENVIRONMENT

AMBIENT TEMPERATURE	From 0 to 50 °C
AMBIENT HUMIDITY	0 to 80% at 25°C, 50% at 40°C (non-condensing)
TEMPERATURE COEFFICIENT	100 ppm/°C
COOLING	Air forced Inlet through front panel (dust filters) Outlet at rear panel

STANDARDS AND REGULATIONS


CE CERTIFIED AND ACCORDING	<p>Low voltage directive: 2014/35/EU</p> <p>EMC directive: 2014/30/EU</p> <p>RoHS directive: 2011/65/EU</p> <p>EN 61000-6-2: 2005 + AC (2005)</p> <p>EN 61000-6-4: 2007 + A1 (2011)</p> <p>EN 61326-1: 2013</p> <p>EN 61000-3-2: 2014</p> <p>EN 61000-3-3: 2013</p> <p>EN 61010-1: 2010</p> <p>EUROLAB EMC decision n°11: issue 1 of 18 of December 2007</p>
----------------------------	--

DOCUMENTATION AND SERVICES

DOCUMENTATIONS	<p>User manual</p> <p>Device test report</p> <p>EU declaration of conformity </p> <p>RoHS2 declaration of conformity </p>
WARRANTY	<p>2 years</p> <p>Extension on demand</p>
ON DEMAND	<p>Factory Acceptance Test (FAT)</p> <p>Detailed design report</p> <p>Custom tests</p> <p>Manufacturing process certification</p> <p>Special engineering</p>

INTERFACES



FRONT PANEL

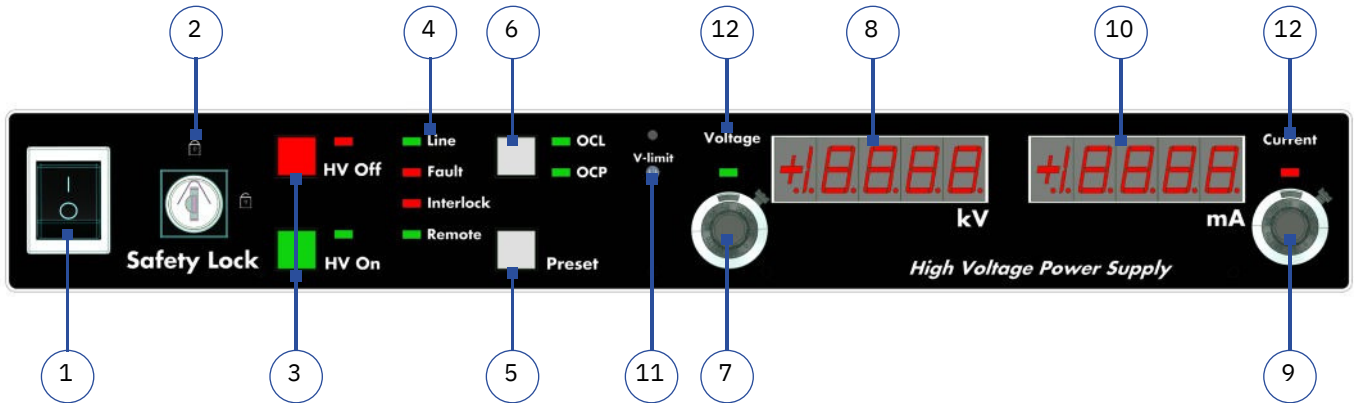

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> 1. ON/OFF switch 2. Safety lock (key) 3. HV ON/OFF push button | <ul style="list-style-type: none"> 4. Statuses (Line, Fault, Interlock, Remote) 5. Preset push button 6. Over Current Limitation (OCL) Over Current Protection (OCP) 7. Voltage setting 11. Local voltage setting limitation 12. Regulation mode (Voltage) | <ul style="list-style-type: none"> 8. Voltage display 9. Current setting 10. Current display 11. Local voltage setting limitation 12. Regulation mode (Current) |
|--|--|--|

REAR PANEL

- 1. HV output
- 2. RS-232 (option)
- 3. Earth bolt
- 4. Ethernet (option)
- 5. Mains input
- 6. Optical fiber (option)
- 7. Analog interface

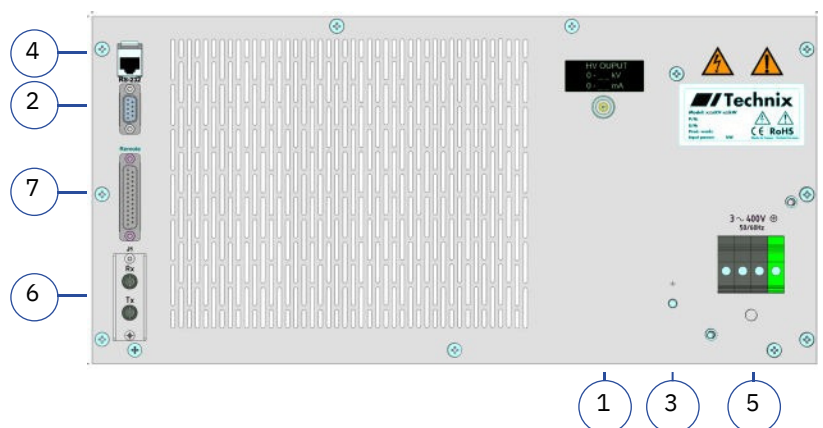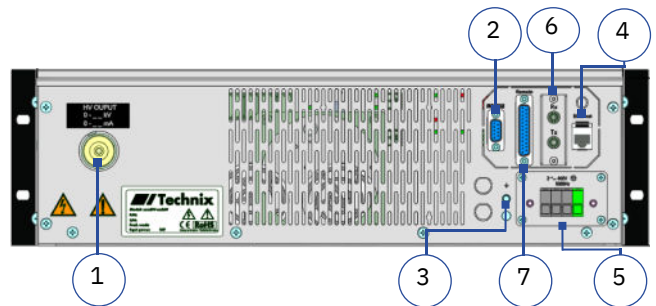

0-10V ANALOG INTERFACE

PIN	SIGNAL	SIGNAL DESCRIPTION	I/O	IMPEDANCE
1	HV-Off control	Produced by a fleeting opening from pin 16	Input	20Ω
2	Fault status	Internal Fault: 0V = Detected; +15V = No	Output	100Ω
3	Interlock status	fault External interlock: 0V = Open; +15V =	Output	475Ω
4	HV-On control	Closed Produced by a fleeting closing to	Input	20Ω
5	Output voltage measurement	pin 16	Output	475Ω
	Output current measurement	0V to 10V = 0% to 100%		475Ω
6	Inhibit control	0V to 10V = 0% to 100%	Output	
7	Remote	Activated by digital signal between +5V to +24V	Input	
8	control	Open contact = Local control mode; Closed contact = Remote control mode	Input	20Ω
9		Not connected		
10	Arc monitor (Mains Monitor for older models)	Generates a signal when an arc is detected: +15V = No arc; 0V = Arc detected Older models (shipped before January 2023): Generates a fault if the mains input is failing: 0V = Mains is fine; +15V = Mains is failing	Output	100Ω
11	Output power measurement (option)	0V to 10V = 0% to 100% (option)	Output	475Ω
12	Local output voltage setting	Copy of the setting on the front panel potentiometer. 0V to 10V = 0% to 100%	Output	10Ω
13	Local output current setting	Copy of the setting on the front panel potentiometer. 0V to	Output	10Ω
14	Remote output current setting	10V = 0% to 100%	Input	115Ω
15	+10V reference	0V to 10V = 0% to 100%	Output	2.7Ω
16	0V reference (digital signals)	+10V reference for analog signals, max current : 5mA	Output	
17	Remote output voltage setting	0V ground reference for digital signals	Output	
18	Regulation mode status or End of Charge status	0V to 10V = 0% to 100% of max output voltage	Input	115Ω
19	HV-On status	DC power supply: Open contact = Current Regulation; +24V = Voltage Regulation CC power supply: Open contact = Capacitor charging; +24V = End of charge	Output	100Ω
20	0V reference (analogue signals)	0V = HV output disabled (HV Off) +15V = HV output enabled (HV On)	Output	100Ω
21-22-23		0V ground reference for analogue signals	Output	
24	External Interlock	Not connected		
25	+10V Reference or Remote output power setting (option)	Connect to pin 16 to close the interlock.	Input	500Ω
		Standard: +10V reference for analog signals, max current : 5mA Option: 0V to 10V = 0% to 100% of max output power	Output	2.7Ω or 115Ω

OPTIONS

- Reversibility
- Floating Outputs
- Arc Management
- Parallel operation
- Custom remote interface
- Zero floating interface
- Emergency stop switch
- Adjustable rise time
- Special mains input
- Non Instrumented front panel
- Industrial dust filters
- Transportable case
- Remote Front panel
- Power regulation
- Tropicalization
- Custom design

RANGES

model reference: SR 700 V to 60 kV - 150 W to 40 kW



VOLTAGE

POWER

OUTPUT VOLTAGE	0.15 kW	0.3 kW	0.6 kW	1.2 kW	1.5 kW	2 kW	3kW	5 kW	6 kW	8 kW	10 kW	15 kW	20 kW	30 kW	40 kW
	Max Current														
0.7 kV	214 mA	428 mA	857 mA	1.71 A	2.14 A	2.86 A	4.29 A	2.14 A	8.57 A	11.43 A	14.29 A	21.43 A	28.57 A	42.86 A	57.14 A
1 kV	150 mA	300 mA	600 mA	1.2 mA	1.5 A	2 A	3 A	5 A	6 A	8 A	10 A	15 A	20 A	30 A	40 A
2.5 kV	60 mA	120 mA	240 mA	480 mA	600 mA	800 mA	1.2 A	2 A	2.4 A	3.2 A	4 A	6 A	8 A	12 A	16 A
3kV	50 mA	100 mA	200 mA	400 mA	500 mA	670 mA	1 A	1.6 A	2 A	2.6 A	3 A	5 A	6.6 A	10 A	13 A
5kV	30 mA	60 mA	120 mA	240 mA	300 mA	400 mA	600 mA	1 A	1.2 A	1.6 A	2 A	3 A	6.4 A	6 A	8 A
10 kV	15 mA	30 mA	60 mA	120 mA	150 mA	200 mA	300 mA	500 mA	600 mA	800 mA	1 A	1.5 A	2 A	3 A	4 A
15 kV	10 mA	20 mA	40 mA	80 mA	100 mA	133 mA	200 mA	333 mA	400 mA	533 mA	667 mA	1 A	1.33 A	2 A	2.67 A
20 kV	7.5 mA	15 mA	30 mA	60 mA	75 mA	100 mA	150 mA	250 mA	300 mA	400 mA	500 mA	750 mA	1 A	1.5 A	2 A
30 kV	5 mA	10 mA	20 mA	40 mA	50 mA	67 mA	100 mA	167 mA	200 mA	267 mA	250 mA	500 mA	667 mA	1 A	1.33 A
40 kV	3.75 mA	7.5 mA	15 mA	30 mA	37.5 mA	50 mA	Contact us	125 mA	150 mA	200 mA	200 mA	275 mA	200 mA	750 mA	1 A
50 kV	3 mA	6 mA	12 mA	24 mA	30 mA	40 mA		100 mA	100 mA	160 mA	30 mA	300 mA	400 mA	600 mA	800 mA
60 kV	2.5 mA	5 mA	10 mA	20 mA	25 mA	33 mA		83.3 mA	100 mA	133 mA	167 mA	250 mA	333 mA	500 mA	667 mA




DIMENSION

MODEL 3U - 19" : 133 x 483 x 480 or 600 mm (H x W x D)

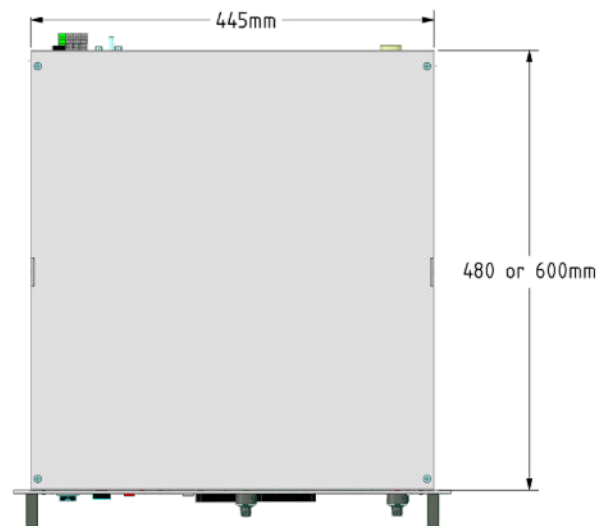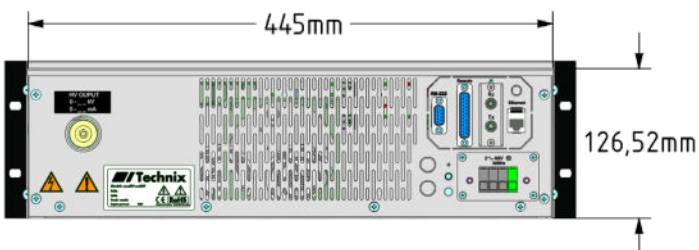





DIMENSION

MODEL 5U - 19" : 222 x 483 x 480 or 600 mm (H x W x D)

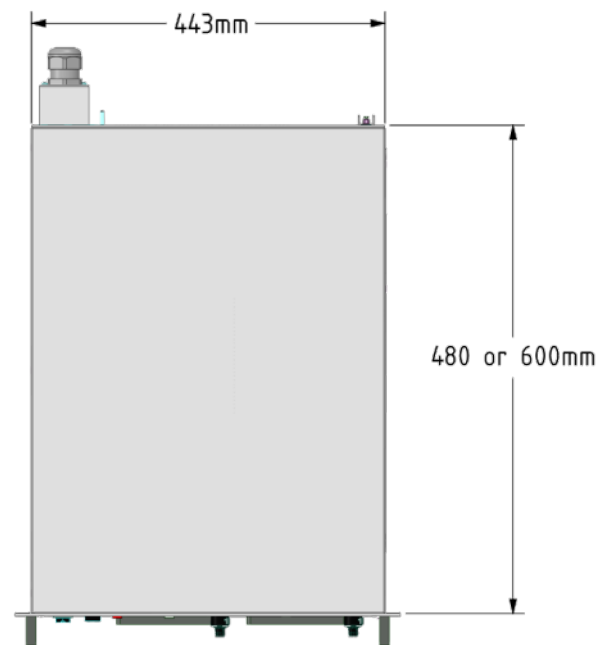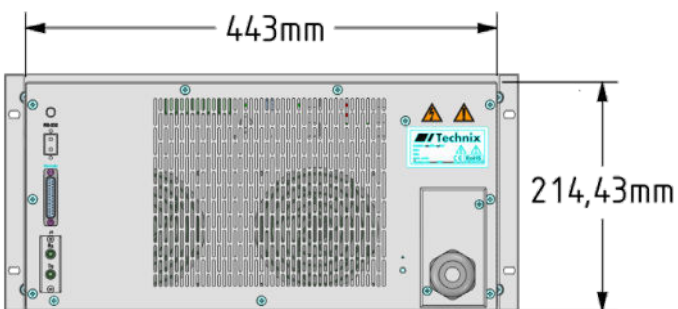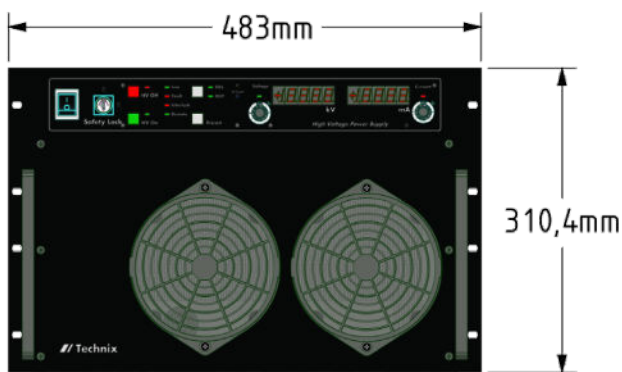

DIMENSION

MODEL 7U - 19" : 311 x 483 x 600 mm (H x W x D)

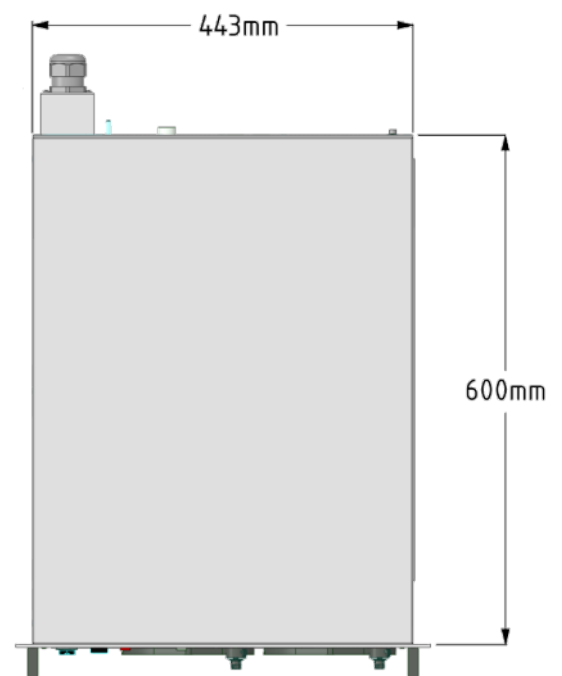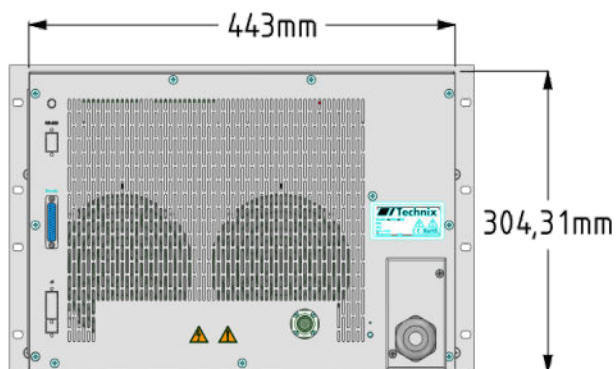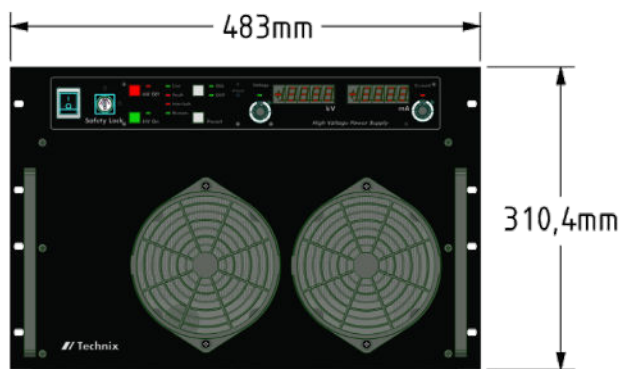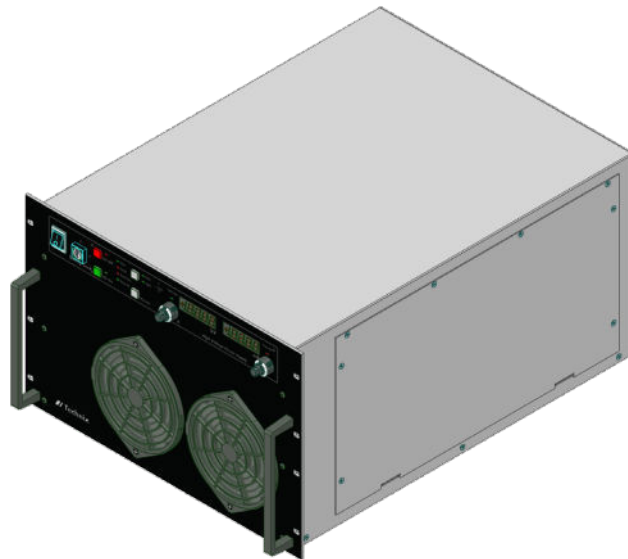

DIMENSION

MODEL 10U - 19" : 444 x 483 x 600mm (H x W x D)

