


**DC VOLTAGE 20KV TO
150KV POWER UP TO 2KW**

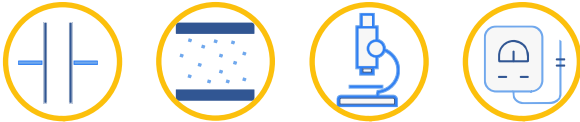

SR series is designed to offer optimal performance in a compact design. Air or special isolated, SR Power Supply from 20kV to 150kV provide high reliability without any special maintenance.

APPLICATIONS

- Pulsed applications
- Capacitors
- Research and Development
- Test Equipment
- Accelerators
- Beams (Electron-Ion)
- Electrostatic

MAIN SPECIFICATION

- Output Voltage: 20kV to 150kV
- Output Power: 300W to 2000W
- Polarity: Positive-Negative-Reversible
- Rise-time(10-90%): <300ms
- Ripple+Noise: 0.1% RMS of max output voltage
- Remote interface: 0-10V analogue

TECHNICAL SPECIFICATIONS

FORMAT	3U 19" Rack, 480mm depth (600mm depth over 100kV)
EFFICIENCY	> 90% at full load
MAINS INPUT	170 V to 255 VAC, 47-63 Hz Single Phase Earth
INPUT POWER	≥ 0.98 at full load
FACTOR INRUSH	Limited to operating current at full power
CURRENT CONTROL	External 0 to 10V signal
MODE REGULATION MODES	Constant Voltage (CV) and Constant Current (CC) regulations, automatic crossover. Power regulation on demand.
STATIC LOAD REGULATION	±0.05% of full voltage or current, from no load to full load (lower on demand)
STATIC LINE REGULATION	±0.05% of full voltage or current for ±10% mains voltage (lower on demand)
STABILITY (AFTER 1-HOUR WARM-UP)	100 ppm/hour, operating at constant load and temperature
PROTECTIONS	Short circuit, Arc quench, External interlock, Over temperature, Overload, Over voltage, Over current
STORED ENERGY	1 J/kW
ACCESSORIES	3m removable coaxial HV cable, interlock terminator, 2 safety keys, CE22 power cord for mains connection (for 300W to 1200W models), CE19 power cord for mains connection (for 2000W models)

CONTROL

LOCAL CONTROLS	Mains power switch, safety lock, HV on, HV off, Over current mode, Preset, Limitation of voltage setting
OUTPUT VOLTAGE AND CURRENT SETTING	10 turn potentiometer (0.05% resolution) Continuously adjustable from 0 to 100%
VOLTAGE AND CURRENT DISPLAY	4.5 Digit
STATUS INDICATORS	HV on, HV off, Line, Fault, Interlock, Remote, Over current limitation/protection, Regulation mode
REMOTE CONTROL INTERFACE	Standard: 0-10V Analogue On demand: RS-232, Ethernet, 0-10V Isolated Analogue, 0-10V Analogue with 24V relay, Optical fiber
REMOTE CONTROL SOFTWARE	Labview



OPERATING ENVIRONMENT

AMBIENT TEMPERATURE	From 0 to 50 °C
AMBIENT HUMIDITY	0 to 80% at 25°C, 50% at 40°C (non-condensing)
TEMPERATURE COEFFICIENT	100 ppm/°C
COOLING	Air forced Inlet through front panel (dust filters) Outlet at rear panel

STANDARDS AND REGULATIONS


CE CERTIFIED AND ACCORDING	<p>Low voltage directive: 2014/35/EU</p> <p>EMC directive: 2014/30/EU</p> <p>RoHS directive: 2011/65/EU</p> <p>EN 61000-6-2: 2005 + AC (2005)</p> <p>EN 61000-6-4: 2007 + A1 (2011)</p> <p>EN 61326-1: 2013</p> <p>EN 61000-3-2: 2014</p> <p>EN 61000-3-3: 2013</p> <p>EN 61010-1: 2010</p> <p>EUROLAB EMC decision n°11: issue 1 of 18 of December 2007</p>
----------------------------	--

DOCUMENTATION AND SERVICES

DOCUMENTATIONS	<p>User manual</p> <p>Device test report</p> <p>EU declaration of conformity </p> <p>RoHS2 declaration of conformity </p>
WARRANTY	<p>2 years</p> <p>Extension on demand</p>
ON DEMAND	<p>Factory Acceptance Test (FAT)</p> <p>Detailed design report</p> <p>Custom tests</p> <p>Manufacturing process certification</p> <p>Special engineering</p>

INTERFACES


FRONT PANEL

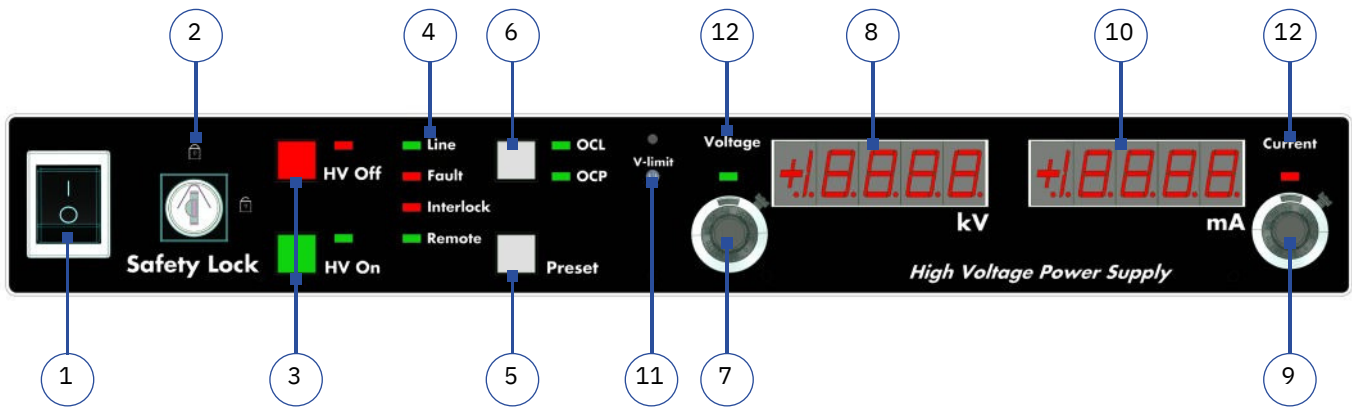

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> 1. ON/OFF switch 2. Safety lock (key) 3. HV ON/OFF push button | <ul style="list-style-type: none"> 4. Statuses (Line, Fault, Interlock, Remote) 5. Preset push button 6. Over Current Limitation (OCL) Over Current Protection (OCP) 7. Voltage setting 11. Local voltage setting limitation 12. Regulation mode (Voltage) | <ul style="list-style-type: none"> 8. Voltage display 9. Current setting 10. Current display 11. Local voltage setting limitation 12. Regulation mode (Current) |
|--|--|--|

REAR PANEL

- 1. HV output
- 2. RS-232
- 3. Earth bolt
- 4. Ethernet (option)
- 5. Mains input
- 6. Optical fiber (option)
- 7. Analog interface (option)

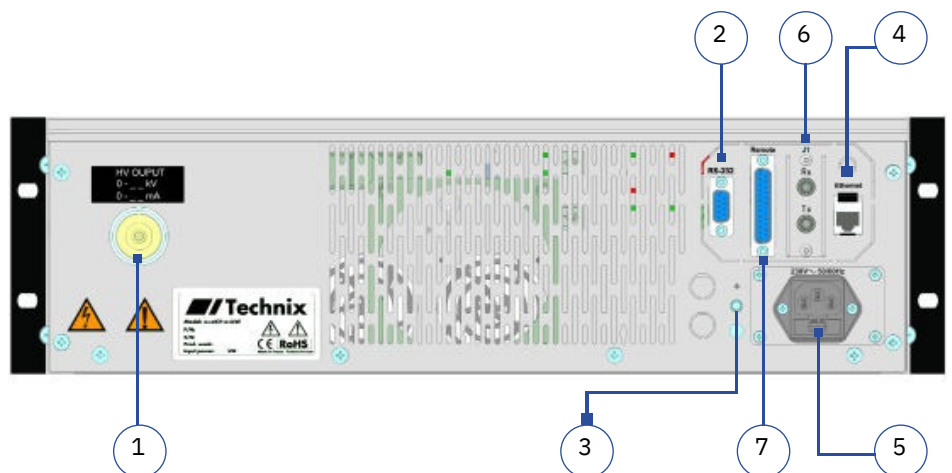

0-10V ANALOG INTERFACE

PIN	SIGNAL	SIGNAL DESCRIPTION	I/O	IMPEDANCE
1	HV-Off control	Produced by a fleeting opening from pin 16	Input	20Ω
2	Fault status	Internal Fault: 0V = Detected; +15V = No	Output	100Ω
3	Interlock status	fault External interlock: 0V = Open; +15V =	Output	475Ω
4	HV-On control	Closed Produced by a fleeting closing to	Input	20Ω
5	Output voltage measurement	pin 16	Output	475Ω
	Output current measurement	0V to 10V = 0% to 100%		475Ω
6	Inhibit control	0V to 10V = 0% to 100%	Output	
7	Remote	Activated by digital signal between +5V to +24V	Input	
8	control	Open contact = Local control mode; Closed contact = Remote control mode	Input	20Ω
9		Not connected		
10	Arc monitor (Mains Monitor for older models)	Generates a signal when an arc is detected: +15V = No arc; 0V = Arc detected Older models (shipped before January 2023): Generates a fault if the mains input is failing: 0V = Mains is fine ; +15V = Mains is failing	Output	100Ω
11	Output power measurement (option)	0V to 10V = 0% to 100% (option)	Output	475Ω
12	Local output voltage setting	Copy of the setting on the front panel potentiometer. 0V to 10V = 0% to 100%	Output	10Ω
13	Local output current setting	Copy of the setting on the front panel potentiometer. 0V to	Output	10Ω
14	Remote output current setting	10V = 0% to 100%	Input	115Ω
15	+10V reference	0V to 10V = 0% to 100%	Output	2.7Ω
16	0V reference (digital signals)	+10V reference for analog signals, max current : 5mA	Output	
17	Remote output voltage setting	0V ground reference for digital signals	Output	
18	Regulation mode status or End of Charge status	0V to 10V = 0% to 100% of max output voltage	Input	115Ω
19	HV-On status	DC power supply: Open contact = Current Regulation; +24V = Voltage Regulation CC power supply: Open contact = Capacitor charging; +24V = End of charge	Output	100Ω
20	0V reference (analogue signals)	0V = HV output disabled (HV Off) +15V = HV output enabled (HV On)	Output	
21-22-23		0V ground reference for analogue signals	Output	
24	External Interlock	Not connected		
25	+10V Reference or Remote output power setting (option)	Connect to pin 16 to close the interlock.	Input	500Ω
		Standard: +10V reference for analog signals, max current : 5mA Option: 0V to 10V = 0% to 100% of max output power	Output	2.7Ω or 115Ω

OPTIONS

- Reversibility
- Arc Management
- Parallel operation
- Custom remote interface
- Zero floating
- Emergency stop switch
- Adjustable rise time
- Special mains input
- Non Instrumented front panel
- Industrial dust filters
- Transportable case
- Remote Front panel
- Power regulation
- Tropicalization
- Custom design

RANGES

model reference: SR 20 kV to 150 kV - 0.3 kW to 2 kW

VOLTAGE

POWER

OUTPUT VOLTAGE	0.3 kW	0.6 kW	1.2 kW	2 kW
	Max Current			
20 kV	15 mA	30 mA	60 mA	10 mA
30 kV	10 mA	20 mA	40 mA	70 mA
40 kV	7.5 mA	15 mA	30 mA	50 mA
50 kV	6 mA	12 mA	24 mA	40 mA
60 kV	5 mA	10 mA	20 mA	30 mA
80 kV	3.75 mA	7.5 mA	15 mA	25 mA
100 kV	3 mA	6 mA	12 mA	20 mA
120 kV	Contact us			
150 kV	Contact us			

DIMENSION

MODEL 3U - 19" : 133 x 483 x 480mm (H x W x D)

